


CMFISMLF RoHS Common Mode Power Inductors



PART NUMBER	INDUCTANCE $\mu\text{H} \pm 30\%$ @ 10kHz	DCR OHMS MAX	CURRENT RATING AMPS	LEAKAGE INDUCTANCE $\mu\text{H REF.}$	INTERWINDING CAPACITANCE pF REF.
CMF1-1003SMLF	100	.026	2.8	.91	1.86
CMF1-2503SMLF	250	.070	1.7	1.97	2.43
CMF1-5003SMLF	500	.192	1.0	3.55	2.71
CMF1-7503SMLF	750	.354	.7	4.85	3.37
CMF1-1004SMLF	1000	.658	.5	7.96	3.45

Inductance and DCR is for each side or single winding. Dielectric withstanding voltage 1250Vrms.

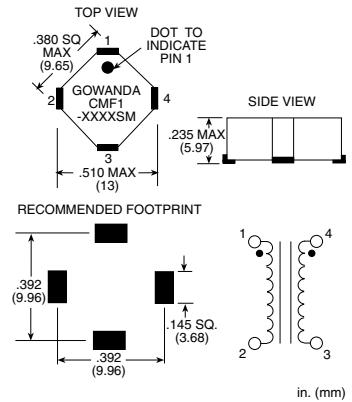

- NOTES:**
- Operating temperature -55°C to +125°C

TAPE AND REEL SPECS:

Pcs./Reel maximum:	800
Pitch between parts:	12 mm
Tape width:	24 mm
Reel diameter inches:	13