


CMF63SM SERIES



Common Mode Transformer Choke



PART NUMBER	L μ H @ 10 kHz	DCR Ω MAX	CURRENT RATING A RMS MAX	LEAKAGE L μ H REF
CMF63-3302SM	33	0.007	5.50	0.20
CMF63-4702SM	47	0.008	5.00	0.30
CMF63-6802SM	68	0.010	4.20	0.42
CMF63-1003SM	100	0.014	3.30	0.55
CMF63-1503SM	150	0.020	2.70	0.85
CMF63-2203SM	220	0.027	2.20	1.20
CMF63-3303SM	330	0.040	1.80	1.80
CMF63-4703SM	470	0.060	1.50	1.60
CMF63-6803SM	680	0.090	1.20	2.10
CMF63-1004SM	1000	0.130	0.90	2.80
CMF63-1504SM	1500	0.190	0.75	4.20
CMF63-2204SM	2200	0.300	0.60	6.00
CMF63-3304SM	3300	0.550	0.40	9.00
CMF63-4704SM	4700	1.050	0.25	13.00

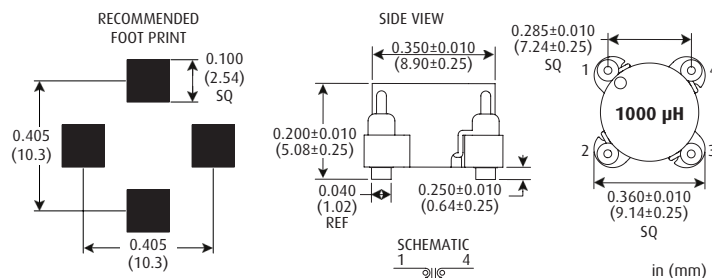

NOTES

- Operating Temperature Range:** -55°C to +125°C
- Current Rating** is based on a 40°C temperature rise at an ambient temperature of 25°C
Note: Current is rated in both windings
- DWV:** 500 Vrms (winding to case top surface)
- Weight MAX:** 0.85 grams
- Marking:** inductance value; color dot (see diagram above)
- Excellent Electromagnetic Shielding
- Leakage inductance is tested in pins 1-2 with pins 3-4 shorted or at pins 3-4 with pins 1-2 shorted
- Inductance and DCR is for each side or single winding
- Windings balanced within 2%
- Custom designs are available to meet your specific requirements; please contact factory
- Applications include:** Reduction of AC line interference produced by switching power supplies, the opposing magnetic fluxes in the core serve to cancel inphase noise signals appearing across the AC line. Also used for noise suppression of DC circuits for switching regulators.

PART NUMBER DERIVATION

GEC Series _____ **CMF63 - 3302SM LF**
Inductance: 3 signif. digits & mult. _____
 ex: 1003 = 100 μ H, 2503 = 250 μ H, 1004 = 1000 μ H
Tolerance: All part numbers provide 25% tolerance on inductance
Termination: LF = RoHS, No Suffix = SnPb (Standard) _____

TAPE AND REEL SPECS

Pieces/reel maximum:	800
Pitch between parts:	16 mm
Tape width:	24 mm
Reel diameter:	13 in.