
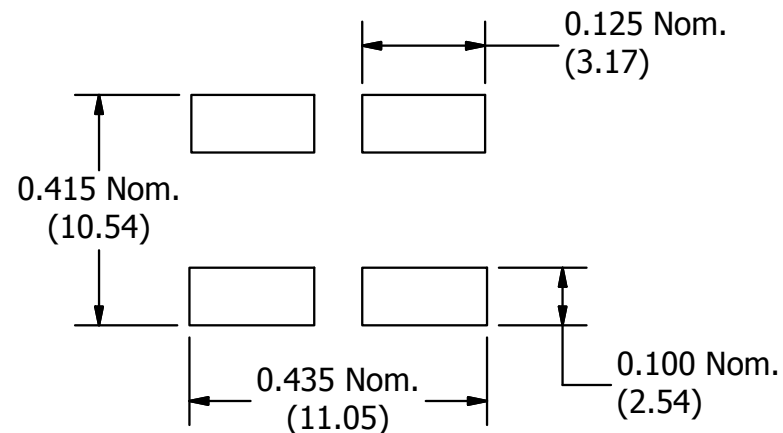





Marking: XXXX is the dash number
Marking example: 030AT1002VSM

Example of XXXX

1002 = 10uH
1003 = 100uH
2503 = 250uH

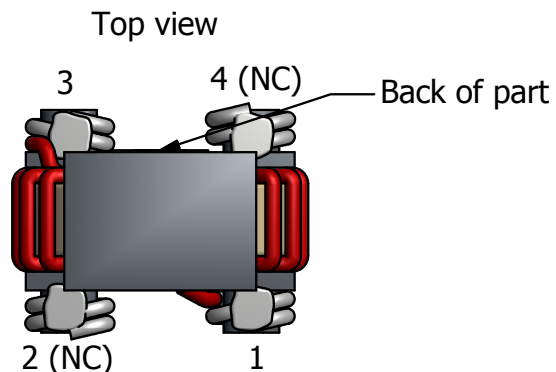

Schematic

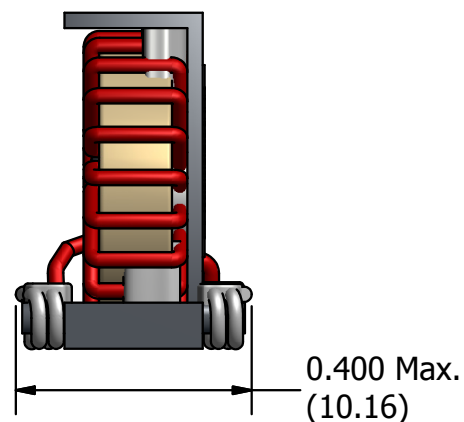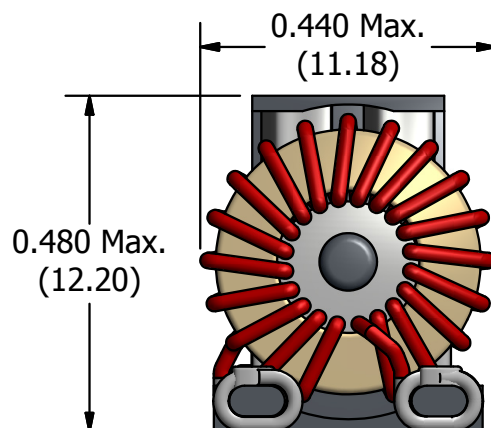

Notes:

- Electromagnetically shielded
- Operating Temperature: -55°C to +125°C

Proprietary

Tape and Reel specs.

- Pcs./Reel Maximum: 225
- Pitch between parts: 24mm
- Tape width: 32mm
- Reel diameter: 13in.

NEXT ASSEM.	USED ON	LTR	REVISION	BY	DATE
		-	Issue	KB	11/14/11
Part #:		030ATVSM Series			
DRAWN BY	KB	Approved By	KB	ENG	QA
	11/14/11				

Unless otherwise specified dimensions are in inches.
Tolerances on
XX ± .030
XXX ± .015
XXXX ± .005
Angles ±
Fractions ±

This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.

Gowanda

ONE MAGNETICS PARKWAY
P.O. BOX 111
GOWANDA, NEW YORK 14070

Phone Number: (716) 532-2234
Website: www.gowanda.com