

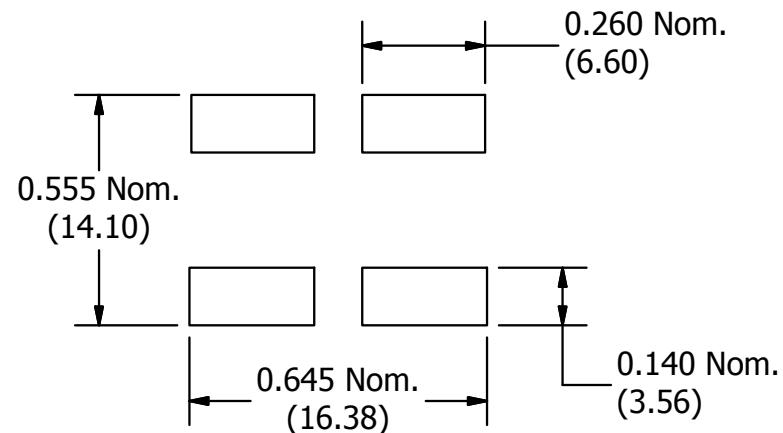
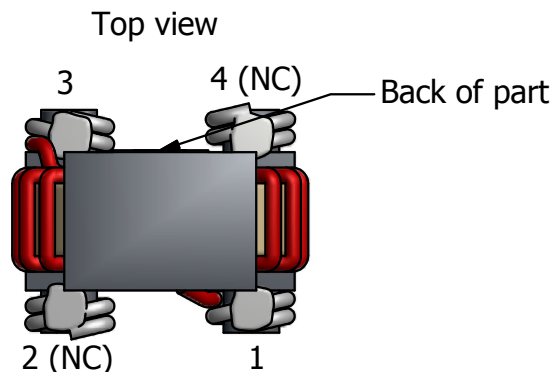
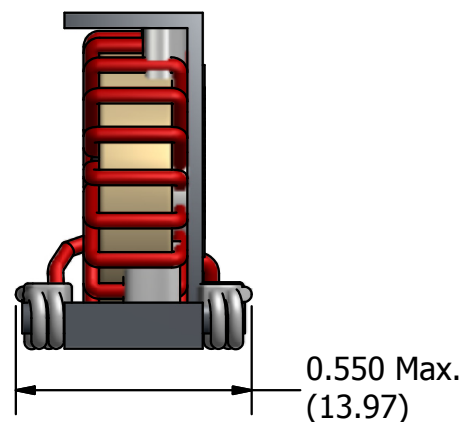


Marking: XXXX is the dash number
 Marking example: 050AT1002VSM

Example of XXXX
 1002 = 10uH
 1003 = 100uH
 2503 = 250uH

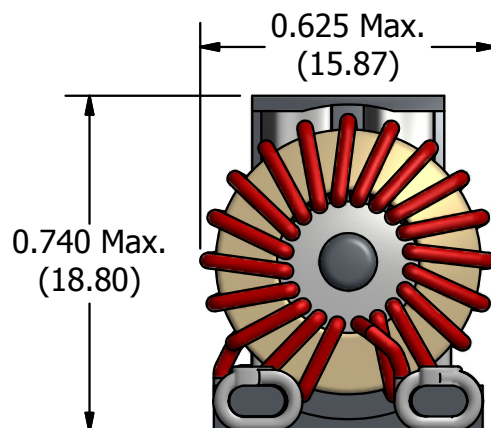

Schematic



Notes:

- Electromagnetically shielded
- Operating Temperature: -55°C to +125°C

Proprietary

Tape and Reel specs.

- Pcs./Reel Maximum: 120
- Pitch between parts: 24mm
- Tape width: 32mm
- Reel diameter: 13in.

NEXT ASSEM.	USED ON	LTR	REVISION	BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on	This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	
		-	Issue	KB	11/14/11			
Part #:		050ATVSM Series				XX ± .030 XXX ± .015 XXXX ± .005 Angles ± Fractions ±		
DRAWN BY	KB	Approved By	KB	ENG	QA	MFG		
	11/14/11							
						ONE MAGNETICS PARKWAY P.O. BOX 111 GOWANDA, NEW YORK 14070		
						Phone Number: (716) 532-2234 Website: www.gowanda.com		