


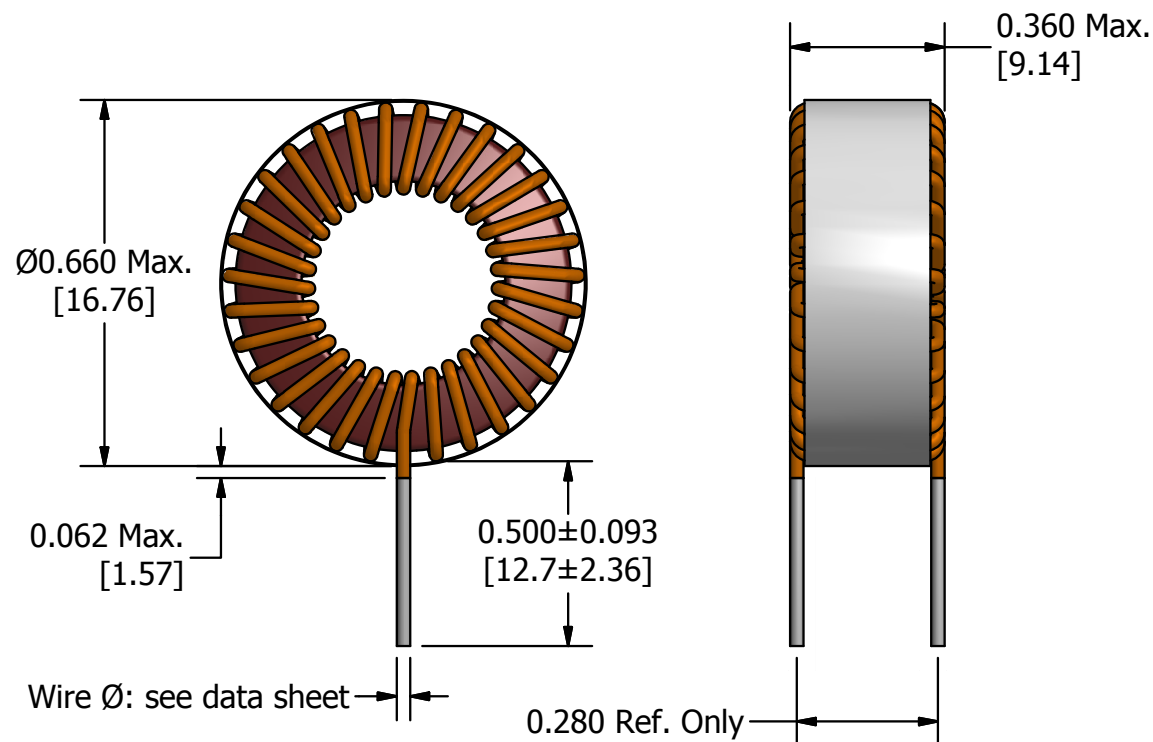

Part Number	Wire Diameter
050HT3900V	0.053 [1.346]
050HT8200V	0.053 [1.346]
050HT1201V	0.053 [1.346]
050HT1501V	0.053 [1.346]
050HT2701V	0.045 [1.143]
050HT4701V	0.042 [1.067]
050HT6801V	0.036 [0.914]
050HT8201V	0.034 [0.864]
050HT1002V	0.034 [0.864]
050HT1202V	0.031 [0.787]
050HT1502V	0.031 [0.787]
050HT2202V	0.031 [0.787]
050HT3202V	0.031 [0.787]
050HT3902V	0.025 [0.635]
050HT4702V	0.025 [0.635]
050HT6802V	0.022 [0.559]
050HT8202V	0.022 [0.559]
050HT1003V	0.022 [0.559]

Notes:

- Temperature range: -55°C to $+200^{\circ}\text{C}$
- Electromagnetically shielded
- Custom designs available
- Packaging: Bulk

NEXT ASSEM.	USED ON	LTR	REVISION	BY	DATE
		B	Add Tape Wrap	JE	12/12/14
Part #:		050HTV Series			
DRAWN BY	KB	Approved By	KB	ENG	QA
					MFG

Unless otherwise specified dimensions are in inches. Tolerances on

XX $\pm$.030
 XXX $\pm$.015
 XXXX $\pm$.005
 Angles $\pm$
 Fractions $\pm$

This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.

The logo for Gowanda, featuring the word "Gowanda" in a bold, green, serif font. The text is centered within a white rectangular box that has a thick blue double-line border.

ONE MAGNETICS PARKWAY
P.O. BOX 111
GOWANDA, NEW YORK 14070

Phone Number: (716) 532-2234
Website: www.gowanda.com