

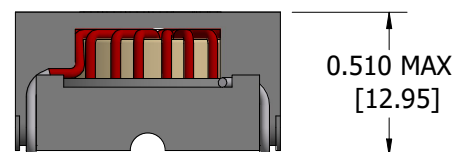
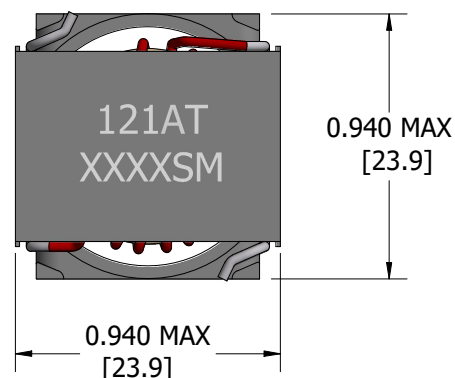


REV.	ECN #	Description	Date	APVD.
Issue		Initial Release		KB
A	8188	Update Format/Template	11/17/21	TJW



Recommended Footprint

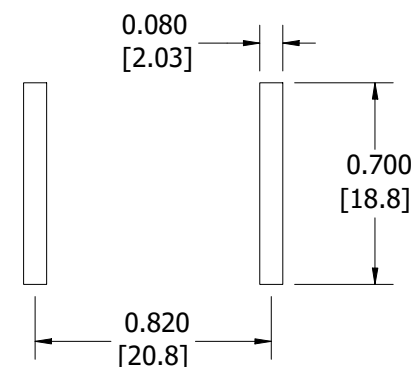

Notes:

- Marking: XXXX (dash #); SM

Example of XXXX

1002 = 10 μ H

1003 = 100 μ H

2503 = 250 μ H

- Termination: No Suffix = SnPb, LF = RoHS Compliant

Tape and Reel Specs:

Pcs./Reel Maximum: 100

Pitch between Parts (mm): 36

Tape Width (mm): 44

Reel Diameter (in.): 13

Unless otherwise specified Inches and (mm)		 GOWANDA Specification Control Drawing		
ENG	JC		Tolerances On: XX ± XXX ± XXXX ± Angles ± Fractions ±	
QA	KH			
MFG				
Drawn By	TJW		Used On	Gowanda Electronics Corp. One Magnetics Parkway Gowanda, New York 14070
Drawn Date:	11/17/2021	Formerly		
Sheet: 1 of 1		Part Description:	Surface Mount Toroidal Inductor	
		Gowanda Part #:	121ATSM / 121ATSM LF	
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.				