

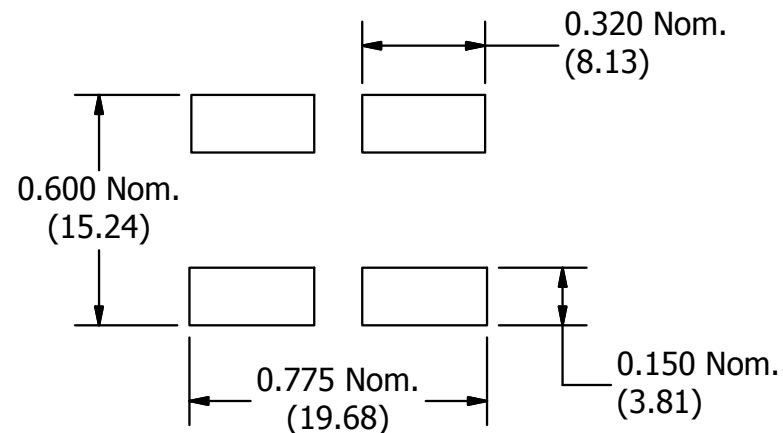
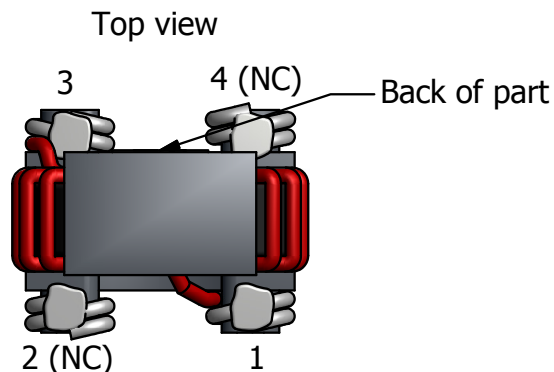
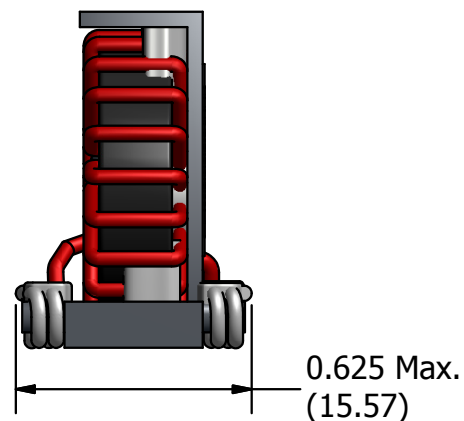


Marking: XXXX is the dash number
 Marking example: 121KM1002VSM

Example of XXXX
 1002 = 10uH
 1003 = 100uH
 2503 = 250uH

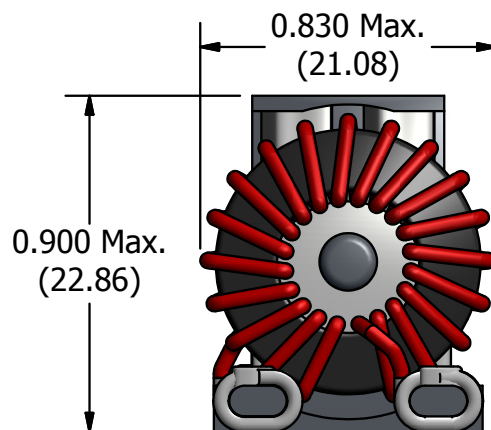

Schematic



Notes:

- Electromagnetically shielded
- Operating Temperature: -55°C to +125°C

Proprietary

Tape and Reel specs.

- Pcs./Reel Maximum: 65
- Pitch between parts: 32mm
- Tape width: 56mm
- Reel diameter: 13in.

NEXT ASSEM.	USED ON	LTR	REVISION	BY	DATE
		-	Issue	KB	11/14/11
Part #:		121KMVSM Series			
DRAWN BY	KB	Approved By	KB	ENG	QA
	11/14/11				MFG

Unless otherwise specified dimensions are in inches.
 Tolerances on
 XX ± .030
 XXX ± .015
 XXXX ± .005
 Angles ±
 Fractions ±

This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.

ONE MAGNETICS PARKWAY
 P.O. BOX 111
 GOWANDA, NEW YORK 14070

Phone Number: (716) 532-2234
 Website: www.gowanda.com

Gowanda