
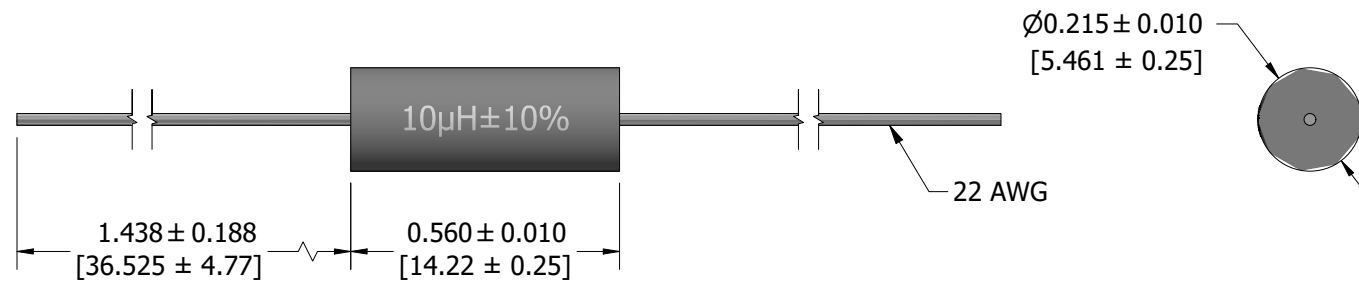


| REV. | ECN # | Description | Date | APVD. |
|-------|-------|------------------------|---------|-------|
| Issue | | Initial Release | | KB |
| A | 8188 | Update Format/Template | 11/5/21 | TJW |

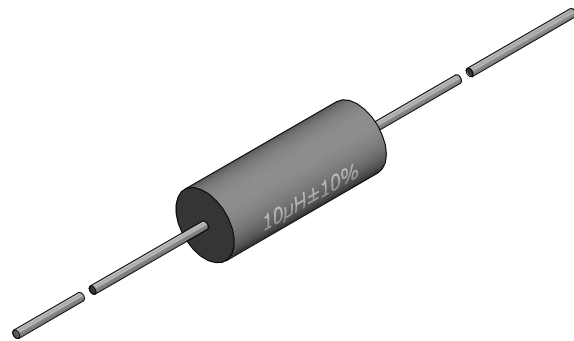


Notes:

- Marking: Inductance with Units and Tolerance
- Termination: No Suffix = SnPb, LF = RoHS Compliant

Tape and Reel Specs:

Pcs./Reel Maximum: 1000
 Pitch between Parts (in.): 0.4
 Tape Width (in.): 2.5
 Reel Diameter (in.): 12
 Class: 2

| Unless otherwise specified Inches and (mm) | | |  GOWANDA Specification Control Drawing | |
|--|-----------|----------------|---|---------------------------|
| ENG | JC | Tolerances On: | | |
| QA | KH | XX ± | Gowanda Electronics Corp. Phone No: (716) 532-2234 One Magnetix Parkway Website: www.gowanda.com Gowanda, New York 14070 Cage Code: 24226 | |
| MFG | | XXX ± | | |
| Drawn By | TJW | XXXX ± | | |
| Drawn Date: | 11/5/2021 | Angles ± | | |
| Sheet: 1 of 1 | | Formerly | Part Description: | Molded Unshielded RF coil |
| | | | Gowanda Part #: | 22M /22MLF |
| This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission. | | | | |