
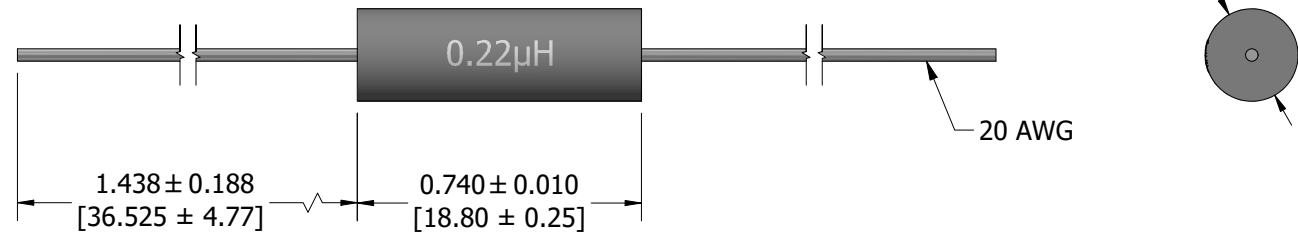


REV.	ECN #	Description	Date	APVD.
Issue		Initial Release		KB
A	8188	Update Format/Template	11/8/21	TJW

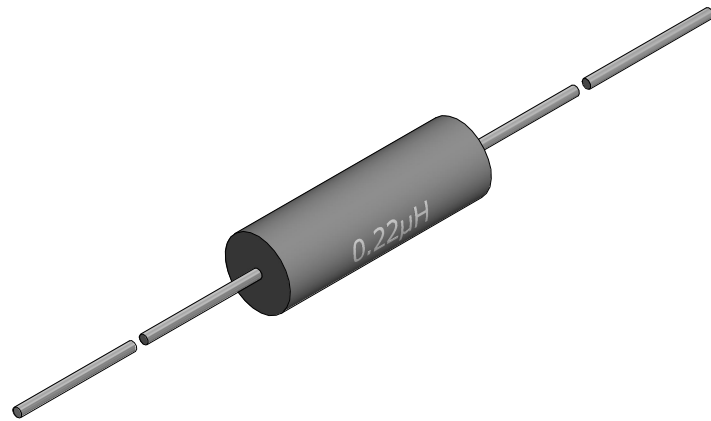

Notes:

- Marking: Inductance with Units
- Termination: No Suffix = SnPb, LF = RoHS Compliant

Tape and Reel Specs:

Pcs./Reel Maximum: 1000
 Pitch between Parts (in.): 0.4
 Tape Width (in.): 2.5
 Reel Diameter (in.): 12
 Class: 2

Unless otherwise specified Inches and (mm)			 GOWANDA Specification Control Drawing
ENG	JC	Tolerances On:	
QA	KH	XX ± XXX ± XXXX ± Angles ± Fractions ±	
MFG			
Drawn By	TJW	Used On	
Drawn Date:	11/8/2021	Formerly	
Sheet: 1 of 1			Part Description: High Current Molded Inductor
			Gowanda Part #: 24FP / 24FPLF
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.			