



C1000FL SERIES



Broadband Conical Flying Lead Inductor
Enhanced DC Current Handling Capability

Outgassing Tested per ASTM E595 (*)


PART NUMBER	L μ H @ 10 MHz TYP	Q μ H @ 10 MHz TYP	DCR Ω MAX	CURRENT RATING mA DC	TURNS	WIRE SIZE AWG
POWDERED IRON CORE						
C1000FL2920C6	5	48	0.030	7700	29	20
C1000FL4524C6	13	39	0.110	3800	45	24
C1000FL5726C6	22	30	0.215	2700	57	26

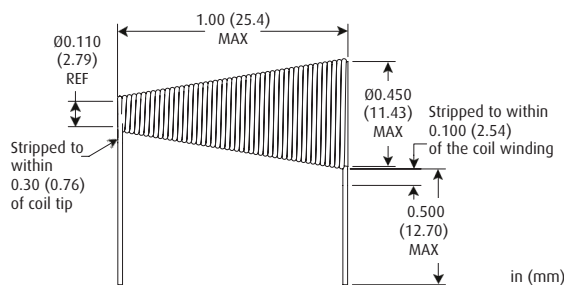

NOTES

- Operating Temperature Range:**
-55°C to +125°C
- Current Rating** is based on a 100°C temperature rise at an ambient temperature of 25°C
- Wire Type:** Copper
- Weight MAX:** 9.0 grams
- All non-tolerance and electrical data are reference only and based on nominal data
- Materials are fungus-inert to meet method 508 of MIL-STD-810H
- * Meets a TML (Total Mass Loss) requirement of 1.0% maximum when tested in accordance with ASTM E595; this calculation does not include WVR (Water Vapor Recovered)
- Custom designs are available to meet your specific requirements; please contact factory

PART NUMBER DERIVATION

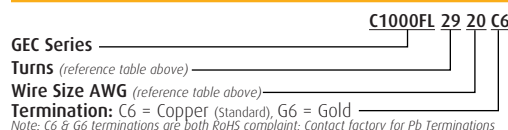

PACKAGING SPECS

Bulk - in Jewel case