

8

7

6

5

4

3

2

1





Marking XXX is the Inductance Value
Examples of XXX

1R0 = 1.0 μ H

010 = 10 μ H

100 = 100 μ H

Recommended Footprint

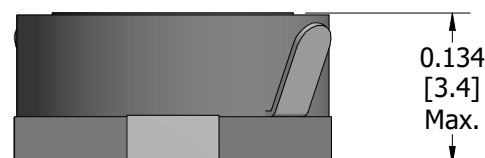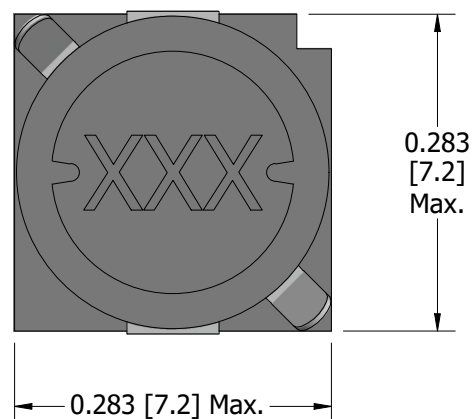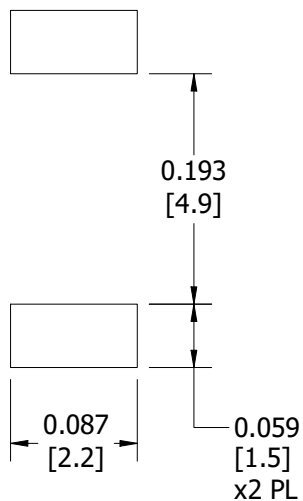

Tape and Reel Specs:
Pcs./Reel Maximum: 1000
Pitch between Parts (mm): 12 mm
Tape Width (mm): 16 mm
Reel Diameter (in.): 13 in.

REV.	ECN #	Description	Date	APVD.
Issue		Initial Release	05.06.14	JE
A	7752	Dwg. Format Update/Notch Loc. Changed/Dim update	06.15.21	CH

Unless otherwise specified Inches and (mm)		GOWANDA® Specification Control Drawing Gowanda Electronics Corp. One Magnetics Parkway Gowanda, New York 14070 Phone No: (716) 532-2234 Website: www.gowanda.com Cage Code: 24226		
ENG	EG			Tolerances On: XX ± XXX ± XXXX ± Angles ± Fractions ±
QA	KH			
MFG				
Drawn By	CH	Used On		
Drawn Date:	04.23.21	Formerly		
Sheet: 1 of 1		Part Description:	Shielded Inductor, RoHS Compliant	
		Gowanda Part #:	GP3484SLF	
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.				