



| 051T RF Toroidal Inductor<br>Part Marking |                                     |
|-------------------------------------------|-------------------------------------|
| Part Number                               | Inductance Value<br>@ 1kHz $\pm$ 2% |
| 051T1004                                  | 1mH                                 |
| 051T2004                                  | 2mH                                 |
| 051T5004                                  | 5mH                                 |
| 051T1005                                  | 10mH                                |
| 051T2005                                  | 20mH                                |
| 051T5005                                  | 50mH                                |
| 051T1006                                  | 100mH                               |
| 051T2006                                  | 200mH                               |
| 051T3006                                  | 300mH                               |
| 051T5006                                  | 500mH                               |

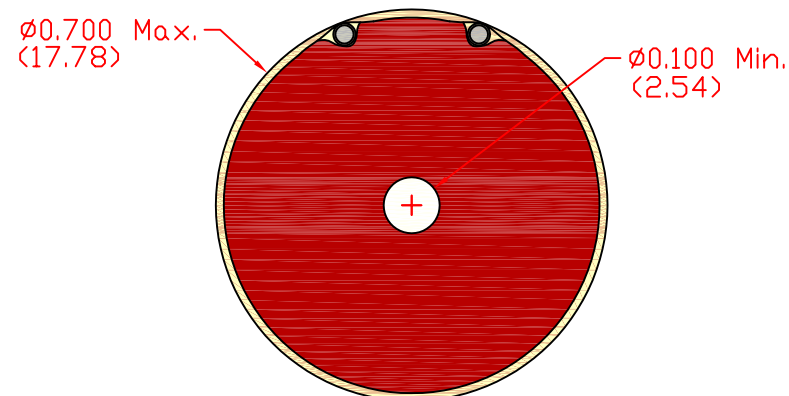

24 AWG stranded copper, tinned  
teflon insulated leads

Vinyl coated, non-flammable, abrasion  
and moisture resistant

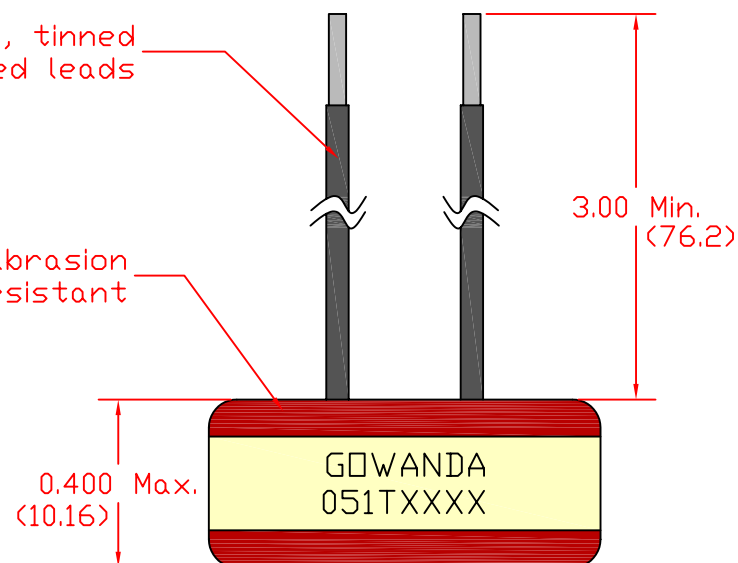

| NEXT ASSEM. | USED ON | LTR.                                  | REVISION          |                  | BY                | DATE |
|-------------|---------|---------------------------------------|-------------------|------------------|-------------------|------|
|             |         |                                       |                   |                  |                   |      |
|             |         |                                       |                   |                  |                   |      |
| Part #:     |         | <b>051T-Dimensional Specification</b> |                   |                  |                   |      |
| DRAWN<br>BY | KB      | APPROVED<br>BY                        | KB <sup>ENG</sup> | BM <sup>QA</sup> | GG <sup>MFG</sup> |      |

Unless otherwise specified  
dimensions are in inches.

in. (mm)

This drawing or  
specification is the  
property of Gowanda  
Electronics. Copies shall  
not be reproduced or  
copied or used as the  
basis for the manufacture  
or sale of apparatus  
without permission.

|                                                                  |                                                         |
|------------------------------------------------------------------|---------------------------------------------------------|
| <h1>GOWANDA</h1>                                                 |                                                         |
| ONE MAGNETICS PARKWAY<br>P.O. BOX 111<br>GOWANDA, NEW YORK 14070 | Phone Number: (716)532-2234<br>Website: www.gowanda.com |