



927T RF Toroidal Inductor Part Marking	
Part Number	Inductance Value @ 1kHz $\pm$ 2%
927T1005	10mH
927T2005	20mH
927T5005	50mH
927T1006	100mH
927T2006	200mH
927T5006	500mH
927T1007	1H
927T2007	2H
927T5007	5H

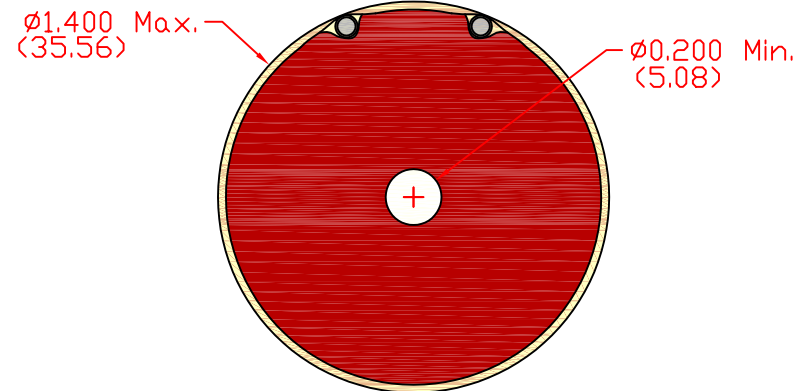

24 AWG stranded copper, tinned
teflon insulated leads

Vinyl coated, non-flammable, abrasion
and moisture resistant

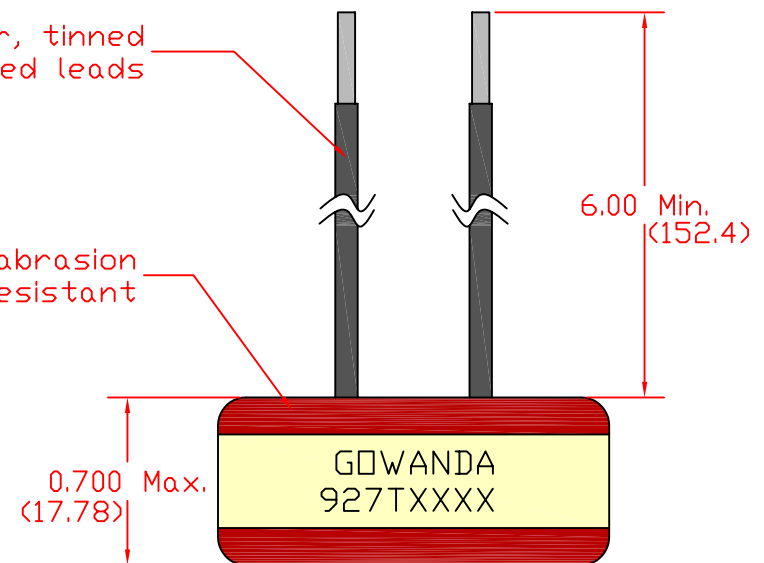

NEXT ASSEM.	USED ON	LTR.	REVISION		BY	DATE
Part #:		927T-Dimensional Specification				
DRAWN BY	KB	APPROVED BY	KB ^{ENG}	BM ^{QA}	GG ^{MFG}	

Unless otherwise specified
dimensions are in inches.
in. (mm)

This drawing or
specification is the
property of Gowanda
Electronics. Copies shall
not be reproduced or
copied or used as the
basis for the manufacture
or sale of apparatus
without permission.

GOWANDA	
ONE MAGNETICS PARKWAY P.O. BOX 111 GOWANDA, NEW YORK 14070	Phone Number: (716)532-2234 Website: www.gowanda.com