

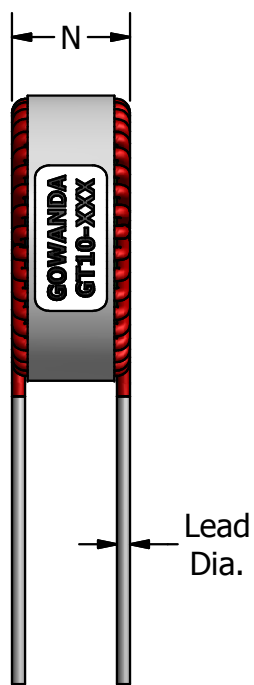
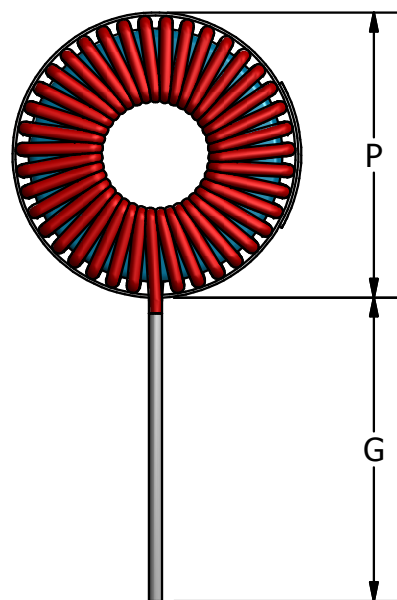





Open Construction Vertical Configuration

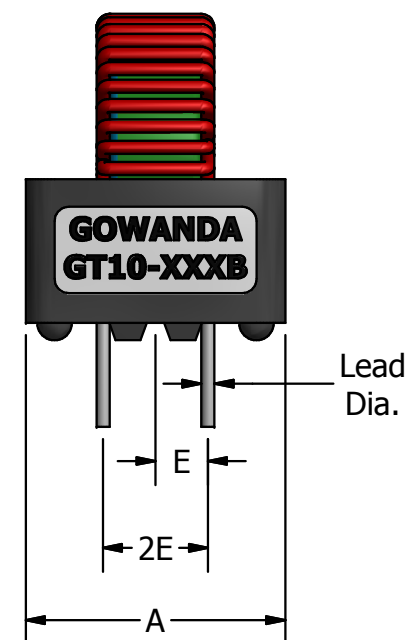

Coil Installed In Mounting Base

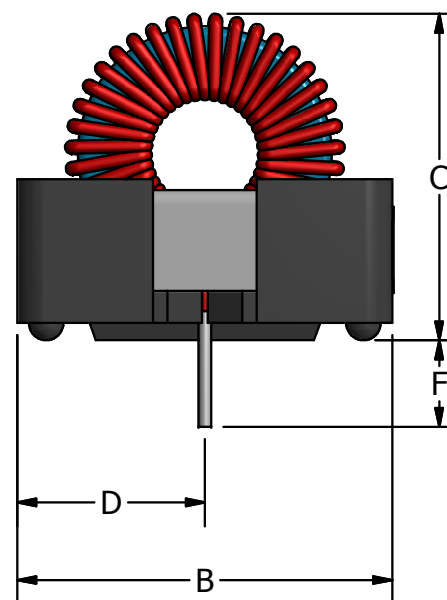

Open Construction Horizontal Configuration

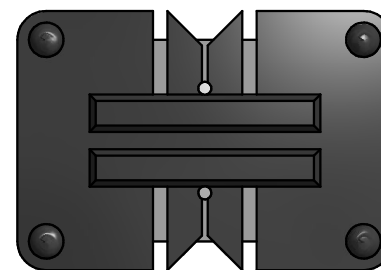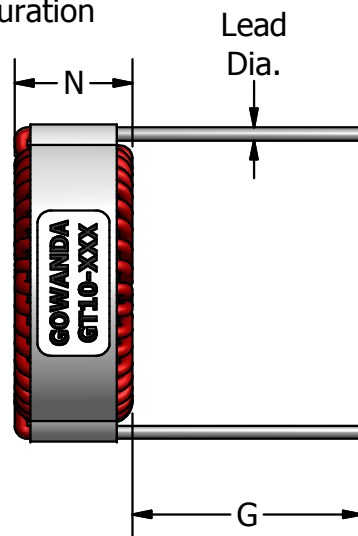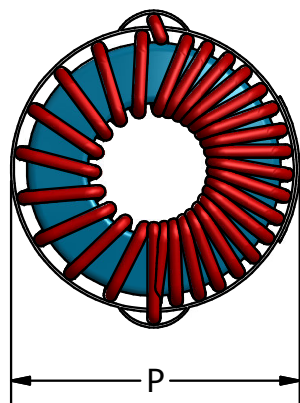

Notes:
Packaging: Bulk Only

NEXT ASSEM.	USED ON	LTR	REVISION			BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on	This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	<
-------------	---------	-----	----------	--	--	----	------	--	--	---

GT10 Series - Toroidal Power Inductors										
Part Number	Lead Diameter	G ± 0.075 (1.90)	P Max.	N Max.	A ± 0.010 (.254)	B ± 0.010 (.254)	C Max.	D Typ.	E Typ.	F Typ.
GT10-099	0.020 (0.51)	0.425 (10.80)	0.55 (13.97)	0.25 (6.35)	0.34 (8.64)	0.58 (14.73)	0.64 (16.26)	0.290 (7.37)	0.11 (2.79)	0.15 (3.81)
GT10-100	0.020 (0.51)	0.425 (10.80)	0.55 (13.97)	0.25 (6.35)	0.34 (8.64)	0.58 (14.73)	0.64 (16.26)	0.290 (7.37)	0.11 (2.79)	0.15 (3.81)
GT10-103	0.025 (0.64)	0.425 (10.80)	0.64 (16.26)	0.34 (8.64)	0.45 (11.43)	0.65 (16.51)	0.73 (18.54)	0.325 (8.26)	0.15 (3.81)	0.15 (3.81)
GT10-111	0.032 (0.81)	0.425 (10.80)	0.84 (21.34)	0.38 (9.65)	0.45 (11.43)	0.83 (21.08)	0.94 (23.88)	0.415 (10.54)	0.15 (3.81)	0.15 (3.81)
GT10-101	0.020 (0.51)	0.425 (10.80)	0.64 (16.26)	0.33 (8.38)	0.45 (11.43)	0.65 (16.51)	0.73 (18.54)	0.325 (8.26)	0.15 (3.81)	0.15 (3.81)
GT10-114	0.042 (1.07)	0.425 (10.80)	1.00 (25.40)	0.51 (12.95)	0.60 (15.24)	0.95 (24.13)	1.07 (27.18)	0.475 (12.06)	0.225 (5.72)	0.15 (3.81)
GT10-116	0.051 (1.30)	0.925 (23.50)	1.30 (33.02)	0.61 (15.49)	0.70 (17.78)	1.25 (31.75)	1.44 (36.58)	0.625 (15.88)	0.25 (6.35)	0.15 (3.81)
GT10-117	0.064 (1.63)	0.925 (23.50)	1.54 (39.12)	0.65 (16.51)	-	-	-	-	-	-
GT10-104	0.025 (0.64)	0.425 (10.80)	0.86 (21.85)	0.36 (9.14)	0.45 (11.43)	0.83 (21.08)	0.96 (24.38)	0.415 (10.54)	0.15 (3.81)	0.15 (3.81)
GT10-115	0.051 (1.30)	0.925 (23.50)	1.51 (38.35)	0.62 (15.75)	-	-	-	-	-	-
GT10-102	0.020 (0.51)	0.425 (10.80)	0.84 (21.34)	0.34 (8.64)	0.45 (11.43)	0.83 (21.08)	0.94 (23.88)	0.415 (10.54)	0.15 (3.81)	0.15 (3.81)
GT10-108	0.032 (0.81)	0.425 (10.80)	0.95 (24.13)	0.50 (12.70)	0.60 (15.24)	0.95 (24.13)	1.06 (26.92)	0.475 (12.06)	0.225 (5.72)	0.15 (3.81)
GT10-112	0.042 (1.07)	0.925 (23.50)	1.24 (31.50)	0.60 (15.24)	0.70 (17.78)	1.25 (31.75)	1.37 (34.80)	0.625 (15.88)	0.25 (6.35)	0.15 (3.81)
GT10-105	0.025 (0.64)	0.425 (10.80)	0.97 (24.64)	0.47 (11.94)	0.60 (15.24)	0.95 (24.13)	1.06 (26.92)	0.475 (12.06)	0.225 (5.72)	0.15 (3.81)
GT10-109	0.032 (0.81)	0.925 (23.50)	1.23 (31.24)	0.56 (14.22)	0.70 (17.78)	1.25 (31.75)	1.33 (33.78)	0.625 (15.88)	0.25 (6.35)	0.15 (3.81)
GT10-113	0.042 (1.07)	0.925 (23.50)	1.48 (37.59)	0.60 (15.24)	-	-	-	-	-	-
GT10-118	0.020 (0.51)	0.425 (10.80)	0.84 (21.34)	0.34 (8.64)	0.45 (11.43)	0.83 (21.08)	0.96 (24.38)	0.415 (10.54)	0.15 (3.81)	0.15 (3.81)
GT10-110	0.032 (0.81)	0.925 (23.50)	1.53 (38.86)	0.59 (14.99)	-	-	-	-	-	-
GT10-106	0.025 (0.64)	0.925 (23.50)	1.21 (30.73)	0.55 (13.97)	0.70 (17.78)	1.25 (31.75)	1.30 (33.02)	0.625 (15.88)	0.25 (6.35)	0.15 (3.81)
GT10-107	0.025 (0.64)	0.925 (23.50)	1.49 (37.85)	0.58 (14.73)	-	-	-	-	-	-

NEXT ASSEM.	USED ON	LTR	REVISION		BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on	This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	
		-	Issue		JE	1/14/14			
Part #:		GT10 - Dimensional Specification					XX ± XXX ± XXXX ± Angles ± Fractions ±		
DRAWN BY		Approved By	DP ^{ENG}	KH ^{QA}	RK ^{MFG}				
1/14/14							ONE MAGNETICS PARKWAY P.O. BOX 111 GOWANDA, NEW YORK 14070 Phone Number: (716) 532-2234 Website: www.gowanda.com		