

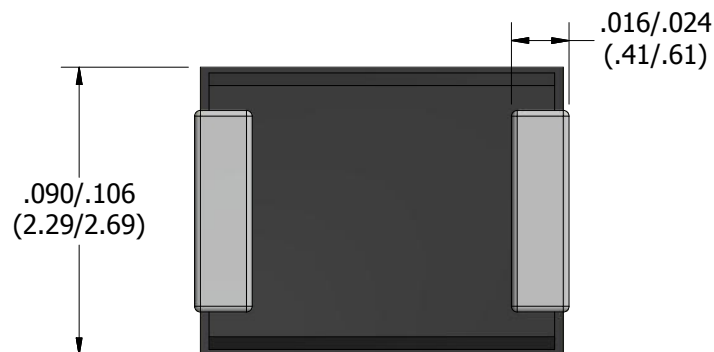
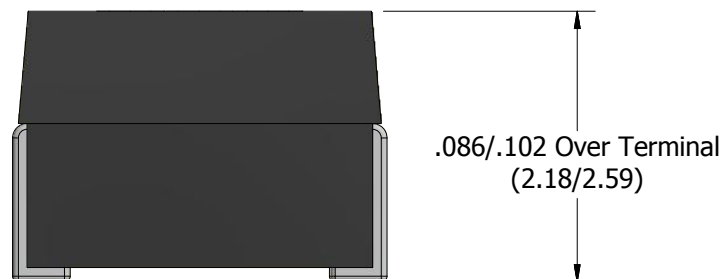
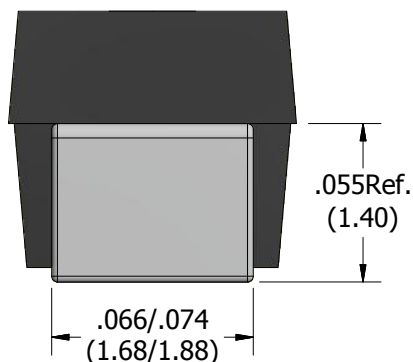


Marking: L in μH
 Example of XXX:
 100= .1 μH
 101= 1.0 μH
 102= 10.0 μH
 103= 100.0 μH

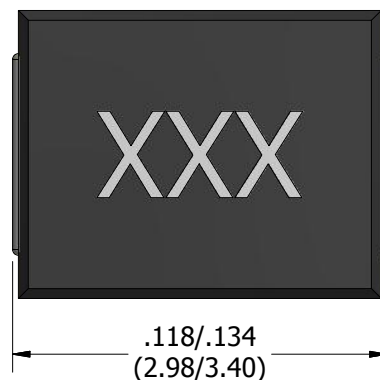

Recommended Footprint

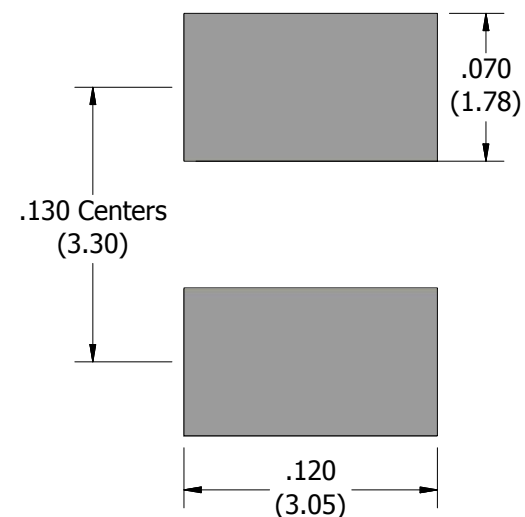

Tape and Reel Specs:

Pcs./Reel maximum: 2000
 Pitch between parts: 8 mm
 Tape Width: 8 mm
 Reel diameter inches: 7

NEXT ASSEM.	USED ON	LTR	REVISION			BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on in. (mm) XX ± XXX ± XXXX ± Angles ± Fractions ±	This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	<div><div><div>Gowanda</div></div><div>ONE MAGNETICS PARKWAY P.O. BOX 111 GOWANDA, NEW YORK 14070</div><div>Phone Number: (716) 532-2234 Website: www.gowanda.com Cage Code: 24226</div></div>
Part #:		SML32S-Dimensional Specification								
DRAWN BY	CH	Approved By		MM	ENG	KH	QA	RK	MFG	