


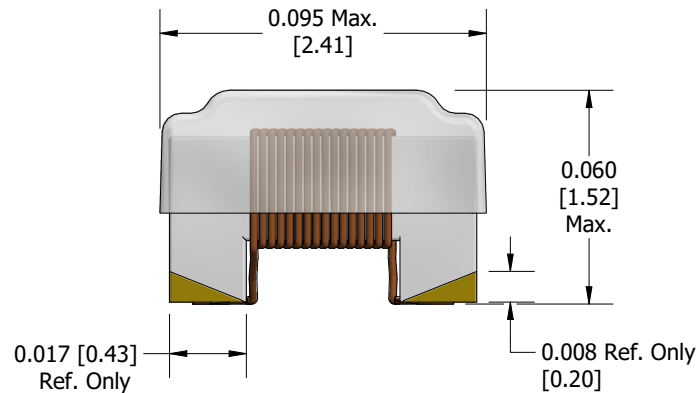


Proprietary

REV.	ECN #	Description	Date	APVD.
Issue		Initial Release	03.01.11	KB
A		Update Format/Template	07.06.21	CH



Recommended Footprint

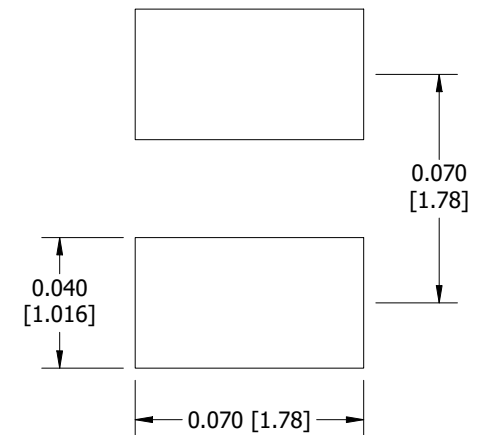

Notes:

- Ceramic core, termination are gold plated nickel

Tape and Reel Specs:

Pcs./Reel Maximum: 2500
Pitch between Parts (mm): 4
Tape Width (mm): 8
Reel Diameter (in.): 7

Unless otherwise specified Inches and (mm)			 GOWANDA Specification Control Drawing	
ENG	JC	Tolerances On:		
QA	KH	XX ± 0.010	Gowanda Electronics Corp. Phone No: (716) 532-2234 One Magnetics Parkway Website: www.gowanda.com Gowanda, New York 14070 Cage Code: 24226	
MFG		XXX ± 0.002		
		XXXX ± 0.005		
Drawn By	CH	Angles ±	Part Description: Ceramic Chip Inductor Gowanda Part #: CC0805	
Drawn Date:		Fractions ±		
		07.06.21	Sheet: 1 of 1	
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.				