

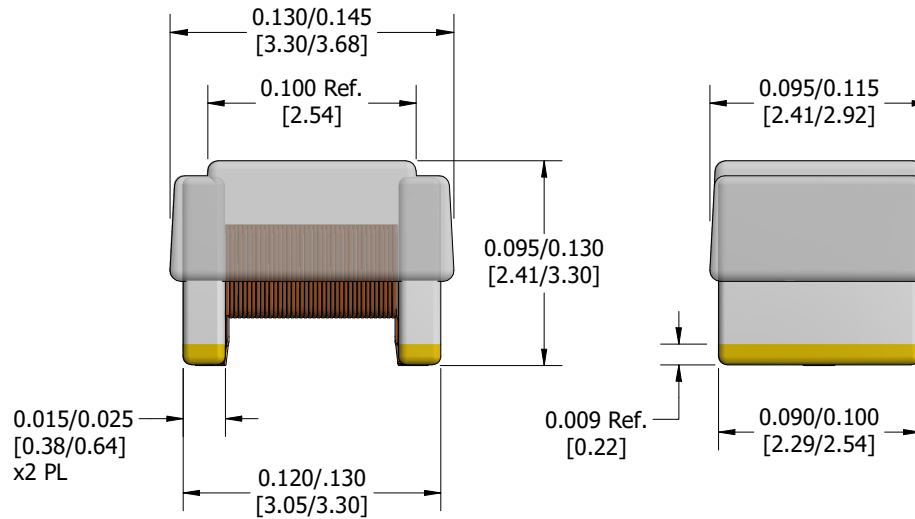


Proprietary

REV.	ECN #	Description	Date	APVD.
Issue		Initial Release	04.30.18	CH
A		Update Format/Template	07.08.21	CH



Recommended Footprint

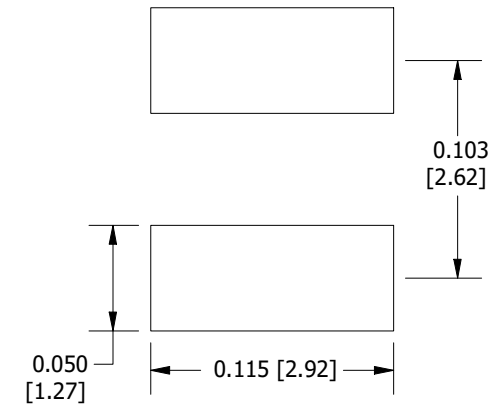

Notes:

- Ceramic core, terminations are gold plated nickel.

Tape and Reel Specs:

Pcs./Reel Maximum: 1500
Pitch between Parts (mm): 4
Tape Width (mm): 8
Reel Diameter (in.): 7

Unless otherwise specified Inches and (mm)		 GOWANDA Specification Control Drawing	Gowanda Electronics Corp. One Magnetics Parkway Gowanda, New York 14070	Phone No: (716) 532-2234 Website: www.gowanda.com Cage Code: 24226	
ENG	JC				Tolerances On: XX ± 0.010 XXX ± 0.005 XXXX ± 0.002 Angles ± Fractions ±
QA	KH				
MFG					
Drawn By	CH				
Drawn Date:	07.08.21	Formerly	Part Description:	Ceramic Chip Inductor	
Sheet: 1 of 1			Gowanda Part #:	CC4H1210	
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.					