

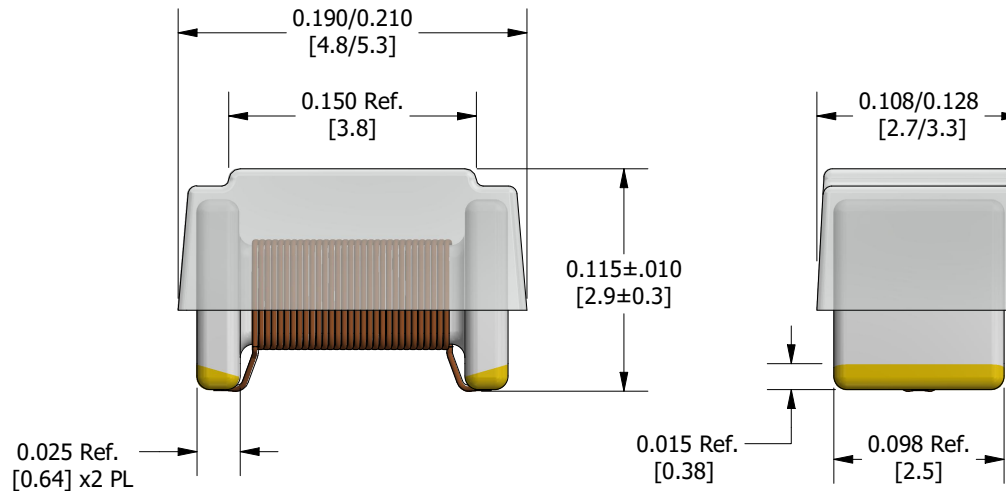


Proprietary

REV.	ECN #	Description	Date	APVD.
Issue		Initial Release	04.30.18	CH
A		Update Format/Template	07.08.21	CH



Recommended Footprint

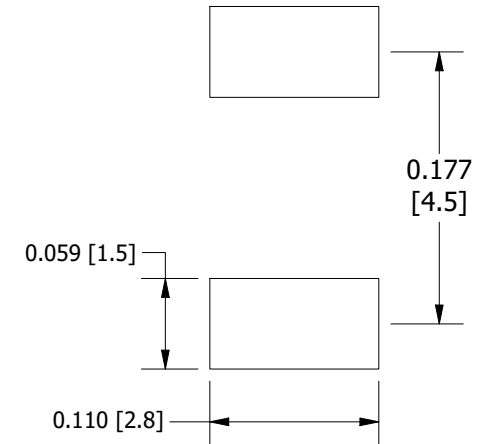

Notes:

- Ceramic core, terminations are gold plated nickel.

Tape and Reel Specs:

Pcs./Reel Maximum: 500
Pitch between Parts (mm): 8
Tape Width (mm): 16
Reel Diameter (in.): 7

Unless otherwise specified Inches and (mm)			 GOWANDA Specification Control Drawing	
ENG	JC	Tolerances On:		
QA	KH	XX ± 0.010		
		XXX ± 0.005		
MFG		XXXX ± 0.002		
		Angles ± Fractions ±		
Drawn By	CH	Used On	Gowanda Electronics Corp. One Magnetics Parkway Gowanda, New York 14070	Phone No: (716) 532-2234 Website: www.gowanda.com Cage Code: 24226
Drawn Date:	07.08.21	Formerly		
Sheet: 1 of 1			Part Description:	Ceramic Chip Inductor
			Gowanda Part #:	CC4H1812
This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.				