



Proprietary

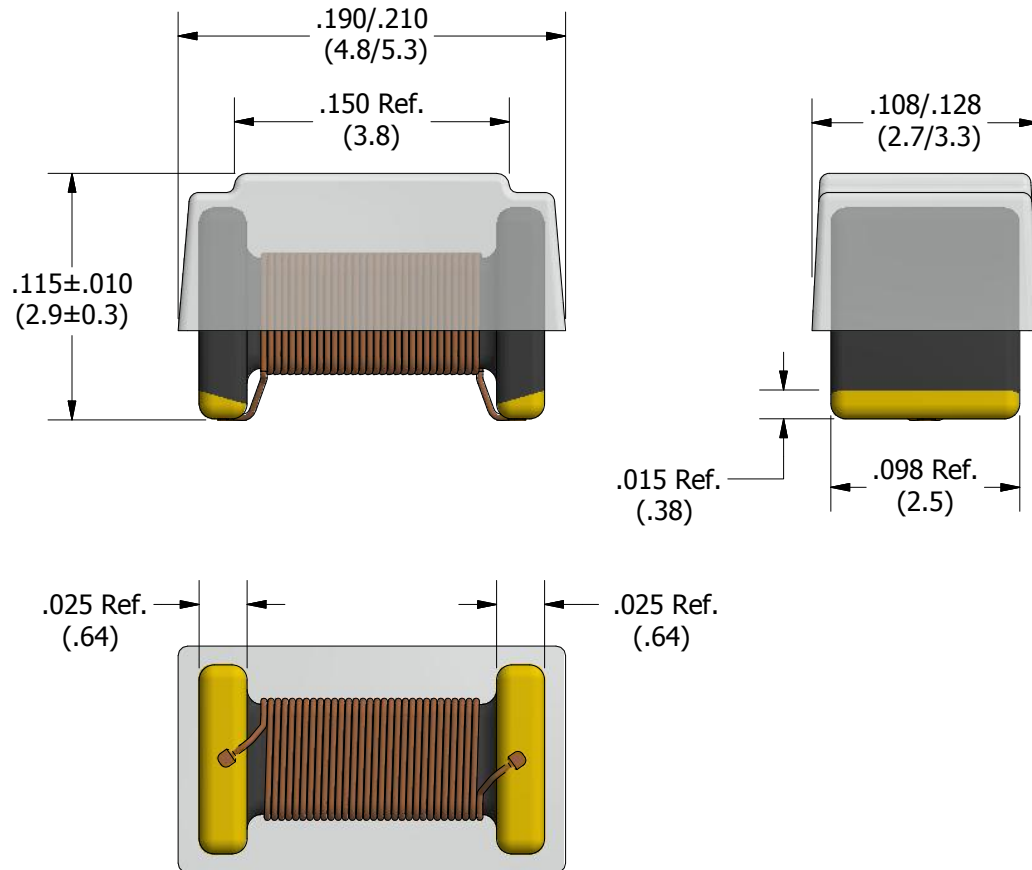

Recommended Footprint

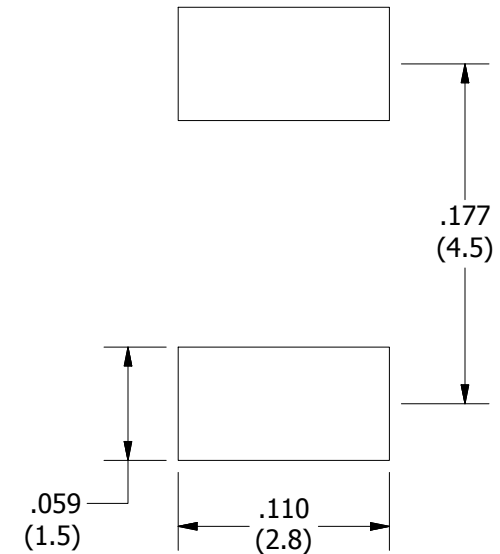

Notes:
 - Ferrite Core, terminations are gold plated nickel.

Tape and Reel Specs:
 Pcs./Reel maximum: 500
 Pitch between parts: 8mm
 Tape width: 16mm
 Reel diameter inches: 7

NEXT ASSEM.	USED ON	LTR	REVISION			BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on XX ± .010 XXX ± .005 XXXX ± .002 Angles ± Fractions ±	This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	<div><div><div>Gowanda</div></div></div> <div>ONE MAGNETICS PARKWAY P.O. BOX 111 GOWANDA, NEW YORK 14070</div> <div>Phone Number: (716) 532-2234 Website: www.gowanda.com Cage Code: 24226</div>
		-	Issue			CH	04/30/18			
Part #:		CF4H1812								
DRAWN BY	CH	04/30/18	Approved By	MM	ENG	KH	QA	MFG		