



050T RF Toroidal Inductor Part Marking	
Part Number	Inductance Value @ 1kHz ± 2%
050T5004	5mH
050T1005	10mH
050T2005	20mH
050T5005	50mH
050T1006	100mH
050T2006	200mH
050T5006	500mH
047T1007	1H

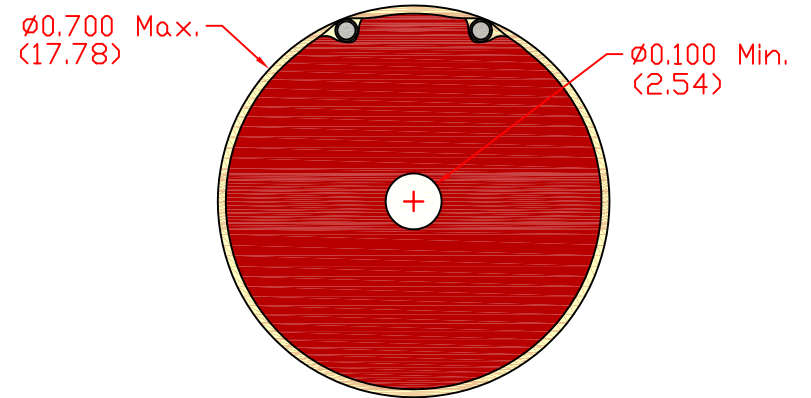

24 AWG stranded copper, tinned
teflon insulated leads

Vinyl coated, non-flammable, abrasion
and moisture resistant

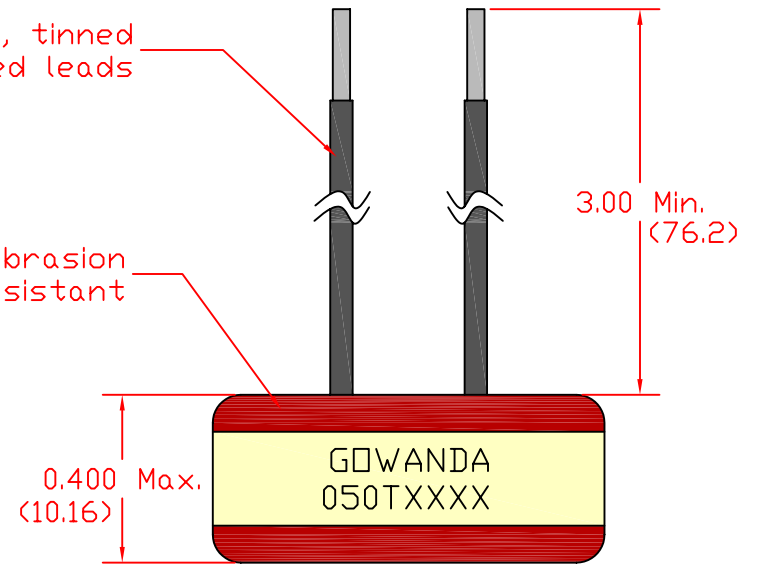

NEXT ASSEM.	USED ON	LTR.	REVISION	BY	DATE
Part #:		050T-Dimensional Specification			
DRAWN BY	KB	APPROVED BY	KB ^{ENG}	BM ^{QA}	GG ^{MFG}

Unless otherwise specified
dimensions are in inches.

in. (mm)

This drawing or
specification is the
property of Gowanda
Electronics. Copies shall
not be reproduced or
copied or used as the
basis for the manufacture
or sale of apparatus
without permission.

GOWANDA

ONE MAGNETICS PARKWAY
P.O. BOX 111
GOWANDA, NEW YORK 14070

Phone Number: (716)532-2234
Website: www.gowanda.com