


CC4H1210

Ceramic High Performance Chip Inductor

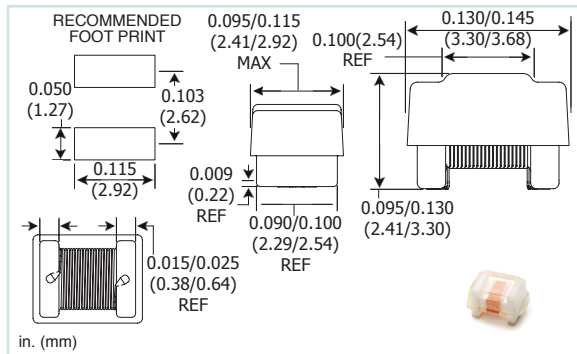

PART NUMBER	L nH	L & Q TEST FREQ MHz	Q MIN	SRF MHz MIN	DCR Ω MAX	CURRENT RATING mA DC MAX
CERAMIC CORE						
CC4H1210-010K	10	50	45	4000	0.080	2000
CC4H1210-012G	12	50	45	3500	0.080	2000
CC4H1210-015G	15	50	45	3000	0.090	1900
CC4H1210-018G	18	50	40	2500	0.090	1900
CC4H1210-022G	22	50	40	2200	0.100	1700
CC4H1210-027G	27	50	40	2000	0.100	1700
CC4H1210-033G	33	50	40	1800	0.110	1520
CC4H1210-039G	39	50	40	1600	0.110	1520
CC4H1210-047G	47	50	40	1400	0.120	1450
CC4H1210-056G	56	50	40	1200	0.130	1400
CC4H1210-068G	68	50	40	1100	0.140	1340
CC4H1210-082G	82	50	40	1000	0.150	1300

NOTES:

- **Operating Temperature Range:**
-55°C to +125°C
- **Current Rating** is based on a 35°C temperature rise at an ambient temperature of 90°C
- **Weight Max:** 0.065 grams
- Suitable for Reflow soldering
- Flat top cover for pick and place
- Excellent for high frequency applications
- No internal solder connection increases reliability
- Very tight distribution within lots
- Extremely high SRF; Exceptional Q
- High current handling capability
- Low DC resistance
- When ordering, specify **tolerance:**
CC4H1210-010K
Tolerance: M = 20%, K = 10%, J = 5%, G = 2%
(Table shows lowest standard tolerance option)
**Optional tolerances are available; contact factory*
- **Termination:** Gold over Nickel
- Custom designs are available to meet your specific requirements; please contact factory

TAPE AND REEL SPECS:

Pcs./Reel maximum:	1500
Pitch between parts:	4 mm
Tape width:	8 mm
Reel diameter:	7 in.