



Vertical Configuration

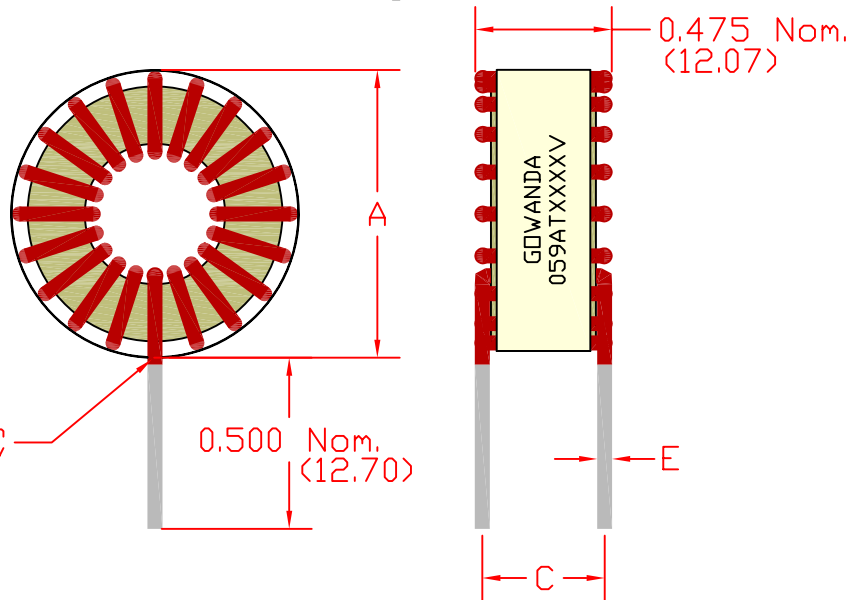

Horizontal Configuration

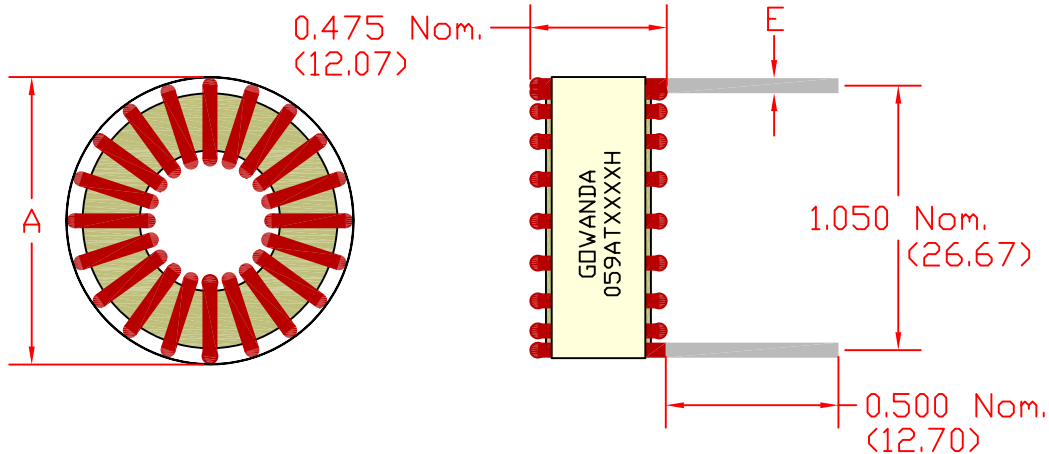

059AT Series - Toroidal Power Inductor Chokes

Part Number	A Nom.	C Nom.	E Nom.
059AT1002	1.100 (27.94)	0.370 (9.40)	0.051 (1.30)
059AT2502	1.100 (27.94)	0.370 (9.40)	0.051 (1.30)
059AT5002	1.100 (27.94)	0.370 (9.40)	0.045 (1.14)
059AT7502	1.100 (27.94)	0.370 (9.40)	0.040 (1.02)
059AT1003	1.100 (27.94)	0.370 (9.40)	0.036 (0.91)
059AT1503	1.100 (27.94)	0.450 (11.43)	0.036 (0.91)
059AT2503	1.150 (29.21)	0.450 (11.43)	0.032 (0.81)
059AT5003	1.150 (29.21)	0.450 (11.43)	0.028 (0.71)
059AT7503	1.150 (29.21)	0.450 (11.43)	0.025 (0.64)

Notes:
Packaging: Bulk only

NEXT ASSEM.	USED ON	LTR.	REVISION	BY	DATE
Part #:		059AT-Dimensional Specification			
DRAWN BY	KB	APPROVED BY	KB ^{ENG}	BM ^{QA}	GG ^{MFG}

Unless otherwise specified dimensions are in inches.

In. (mm)

This drawing or specification is the property of Gowanda Electronics. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.

GOWANDA

ONE MAGNETICS PARKWAY
P.O. BOX 111
GOWANDA, NEW YORK 14070

Phone Number: (716)532-2234
Website: www.gowanda.com